





STANDARD WAX FOR FLAT HEAD PRINTERS

COMPETITIVENESS GOOD PRINTING QUALITY RECEPTOR MULTI-COMPATIBILITY

AWR®1 is the most competitive wax ribbon of the ARMOR range. The very high sensitivity of the ink allows printing with low levels of energy with less stress on the printhead. AWR®1 is therefore the ideal solution for applications particularly sensitive to the quality/price ratio.

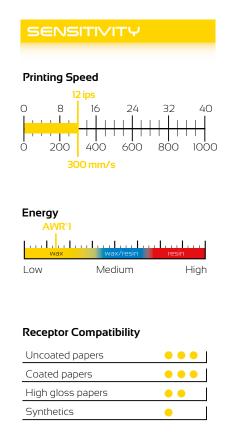

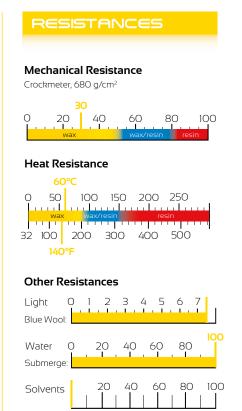









STANDARD WAX FOR FLAT HEAD PRINTERS

APPLICATION FIELDS

The characteristics of $AWR^{*}I$ answer the requirements of the following application fields:

(If your application is not among the ones below, please contact us.)



















ABC 123

















RIBBON SPECIFICATIONS

Backcoating:

Silicon based. Friction coefficient: Kd < 0.2.

Ink:

Wax.
Melting point:
65°C / 149°F
(ARMOR procedure).

Thickness: 4.5 µm.



Storage:

12 months, 5-35°C (40-95°F), 20-80 % Humidity Rate.

Ribbon:

Thickness (black): < 8 µm.
The ribbon is anti static build-up treated

CERTIFICATIONS

REACH / SVHC Free: 1907/2006/EC

Food Contact Approved: 1935/2004/EC

Heavy metals: - 2002/95/EC

- 2002/96/EC

- 2011/65/EC

California Proposition 65

Halogen Free

COLOUR RANGE

Black

SUSTAINABLE DEVELOPMENT

ARMOR evaluation of AWR®1:

To be compared with our other products



Quality, Health/Safety, Environment:













Responsible Care: International Council of Chemical Associations' charter towards constant improvements in health, safety and environment.



Global Compact: UN initiative inviting companies to apply fundamental ethical and environmental values.



PET film:

